

DIGITAL AC CLAMP METER MS2030 / MS2030A / MS2030B




MS2030

JAW SIZE
Φ28mm/1.1"

VOLTAGE AC 600V
DC 600V

CURRENT
AC 200A

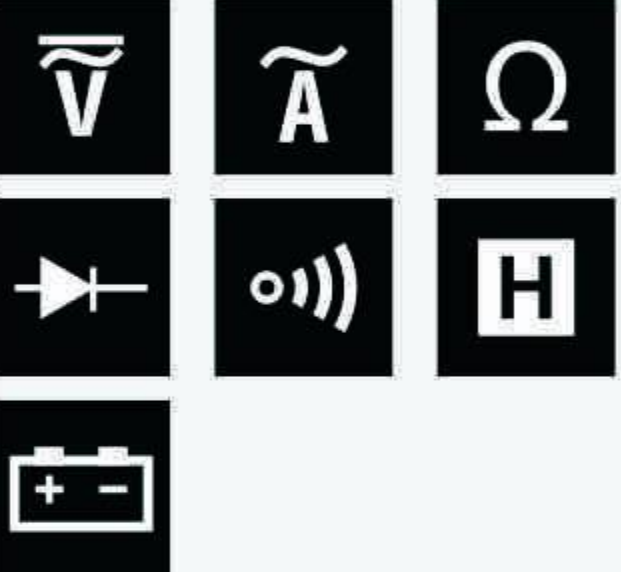

MS2030A




MS2030B

JAW SIZE
Φ28mm/1.1"

VOLTAGE AC 600V
DC 600V

CURRENT
AC 600A

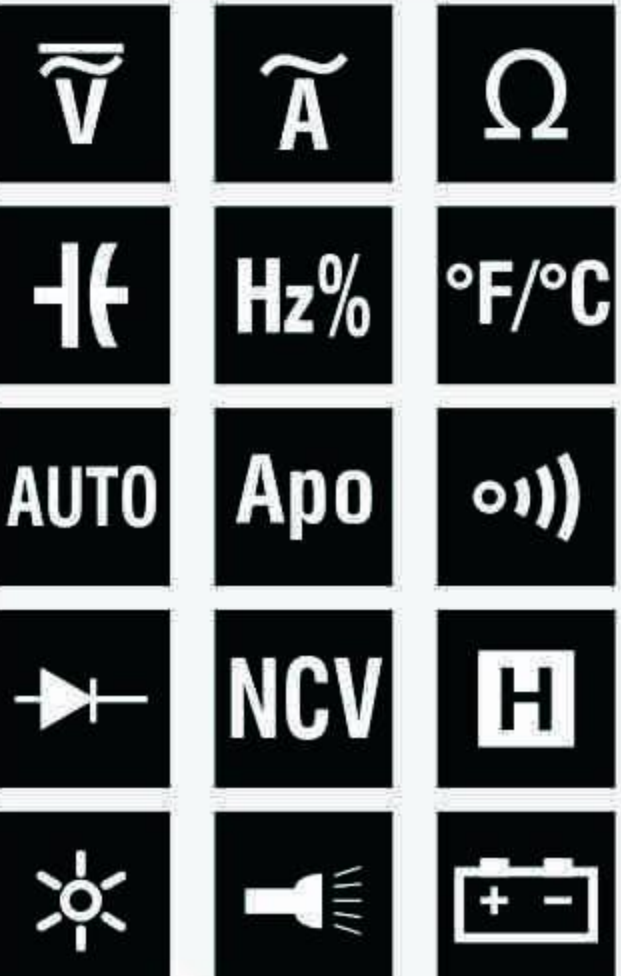

Specifications

Specifications	Range	MS2030	MS2030A	MS2030B
DC Voltage	600V	±(1.0%+3)	±(1.0%+3)	
	400mV/4/40/400/600V			±(0.8%+3)
AC Voltage	600V	±(1.5%+10)	±(1.5%+10)	
	4V/40V/400V/600V			±(1.0%+5)
AC Current	2A/20A/200A		±(2.0%+10)	
	2A/20A/400A	±(2.0%+10)		
	4A/40A/400A/600A			±(2.5%+5)
Resistance	2kΩ	±(1.0%+5)	±(1.0%+5)	
	400Ω/4/40/400k/4M 40M			±(1.0%+5) ±(2.0%+5)
Frequency	50/500Hz/5/50/100kHz			±(1.0%+5)
Capacitance	50/500n/5/50u/100uF			±(4.0%+5)
Temperature	-20°C~1000°C			±(3.0%+3)
	-4°F~1832°F			±(3.0%+3)
Duty Cycle	0.1%~99.9%			±(1.0%+3)

Features

Features		MS2030	MS2030A	MS2030B
Display	counts	2000	2000	4000
Jaw Size		Φ28mm/1.1"	Φ28mm/1.1"	Φ28mm/1.1"
Auto Ranging				●
Auto Power Off			●	●
Diode	1.8V	●	●	●
Continuity	<30Ω	●	●	●
Data Hold		●	●	●
Display Backlight			●	●
Work Light			●	●
NCV	Non-Contact Voltage Detector		●	●
LBD	Low Battery Display	●	●	●

General

Power Supply	3x1.5V AAA Batteries
Product Size	198mmx79mmx38mm/7.8"x3.1"x1.5"
Product Weight	194g/0.43lb
Safety Rating	CE ETL CAT III 600V RoHS